




HIKEN | HC400 SKID STEER LOADER

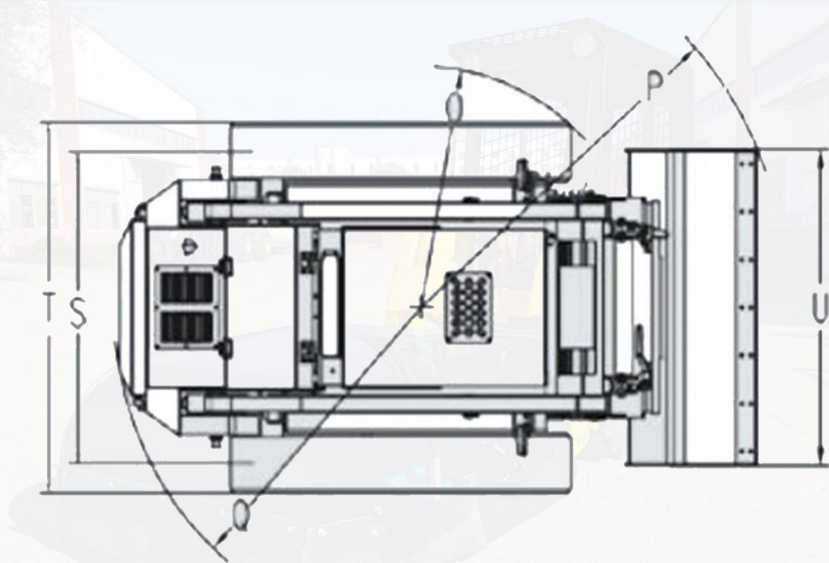

HIKEN | TECHNICAL DATA

Overall Operating Height(mm)	3400
Height to bucket hinge pin (mm)	2500
Hheight to top of cab (mm)	1813
Height to bottom of level bucket (mm)	2446
Without bucket length (mm)	/
Overall Length With Bucket(mm)	/
Dumping angle at maximum height(°)	40
Dumping height (mm)	2000
Dumping reach (mm)	441
Rollback o bucket on ground(°)	30

Wheelbasel (mm)	801
Ground clearance(mm)	145
Angle of departure(°)	20
Front turning radius without bucket(mm)	960
Front tuning radius(mm)	1660
Rear tuning radius(mm)	1253
Rear axle to bumper(mm)	/
Operating load(kg)	380
Max Speed	9km/h
Rollback of bucket at full height(°)	104



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HC700 SKID STEER LOADER

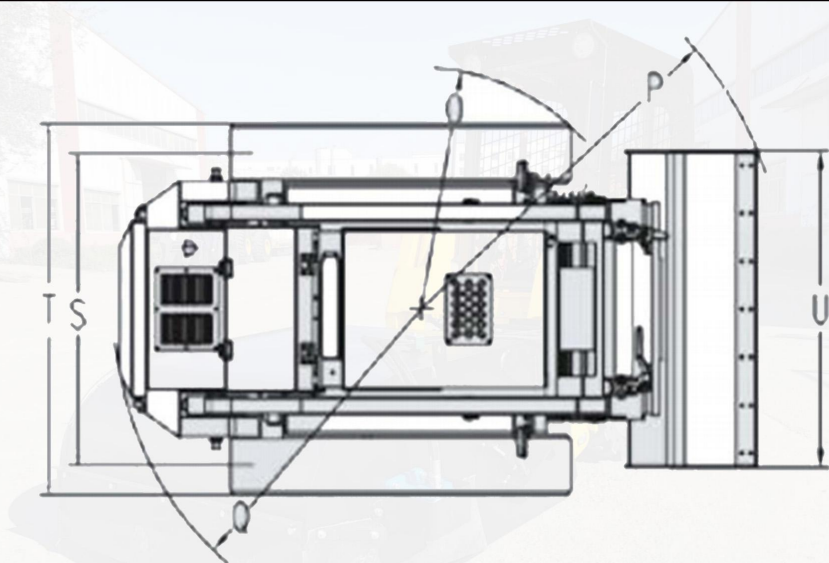

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	3350
Height to bucket hinge pin (mm)	2770
Hheight to top of cab (mm)	2050
Height to bottom of level bucket (mm)	2603
Without bucket length (mm)	2300
Overall Length With Bucket(mm)	2950
Dumping angle at maximum height(°)	40
Dumping height (mm)	2100
Dumping reach (mm)	790
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1240
Ground clearance(mm)	140
Angle of departure(°)	20
Front turning radius without bucket(mm)	1064
Front tuning radius(mm)	1825
Rear tuning radius(mm)	1264
Rear axle to bumper(mm)	594
Operating load(kg)	700
Max Speed	10km/h
Overall length(mm)	2950
Overall width (mm)	1402



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HC1000 SKID STEER LOADER

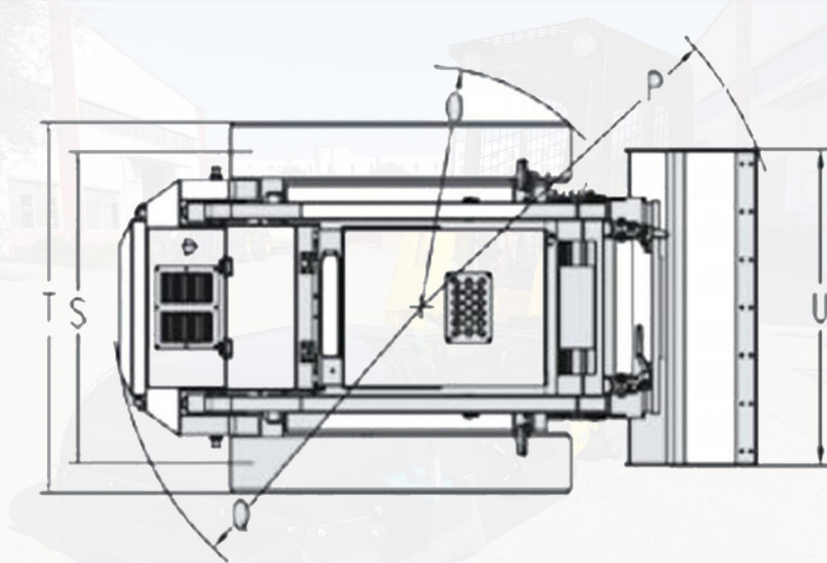

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	3480
Height to bucket hinge pin (mm)	2900
Hheight to top of cab (mm)	2150
Height to bottom of level bucket (mm)	2730
Without bucket length (mm)	2750
Overall Length With Bucket(mm)	3500
Dumping angle at maximum height(°)	40
Dumping height (mm)	2230
Dumping reach (mm)	715
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1500
Ground clearance(mm)	200
Angle of departure(°)	20
Front turning radius without bucket(mm)	1298
Front tuning radius(mm)	2010
Rear tuning radius(mm)	1714
Rear axle to bumper(mm)	890
Operating load(kg)	1000
Max Speed	12km/h
Overall length(mm)	3500
Overall width (mm)	1782



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.



Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HC1200 SKID STEER LOADER

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	4070
Height to bucket hinge pin (mm)	3150
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	2983
Without bucket length (mm)	3000
Overall Length With Bucket(mm)	3700
Dumping angle at maximum height(°)	40
Dumping height (mm)	2450
Dumping reach (mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1500
Ground clearance(mm)	200
Angle of departure(°)	20
Front turning radius without bucket(mm)	1365
Front tuning radius(mm)	2200
Rear tuning radius(mm)	1742
Rear axle to bumper(mm)	938
Operating load(kg)	1200
Max Speed	9/18
Overall length(mm)	3700
Overall width (mm)	1994




Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.

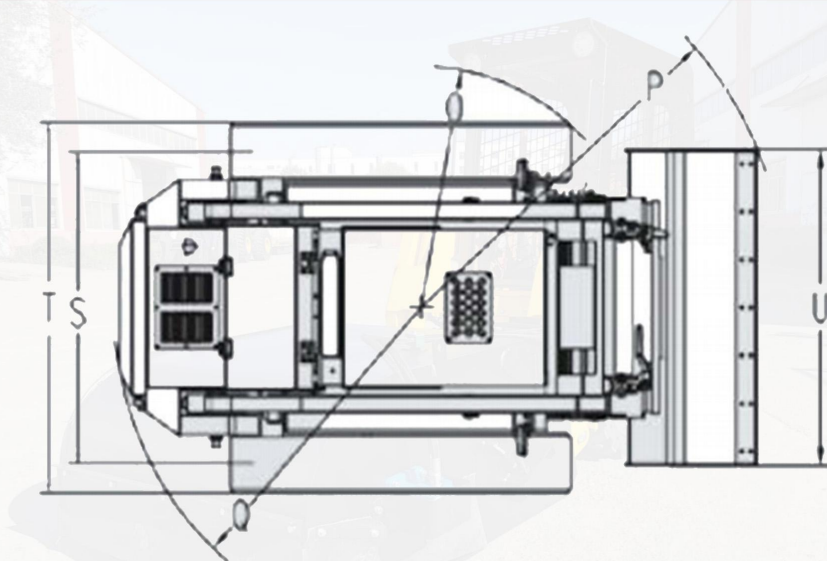



HIKEN | HC1500 SKID STEER LOADER

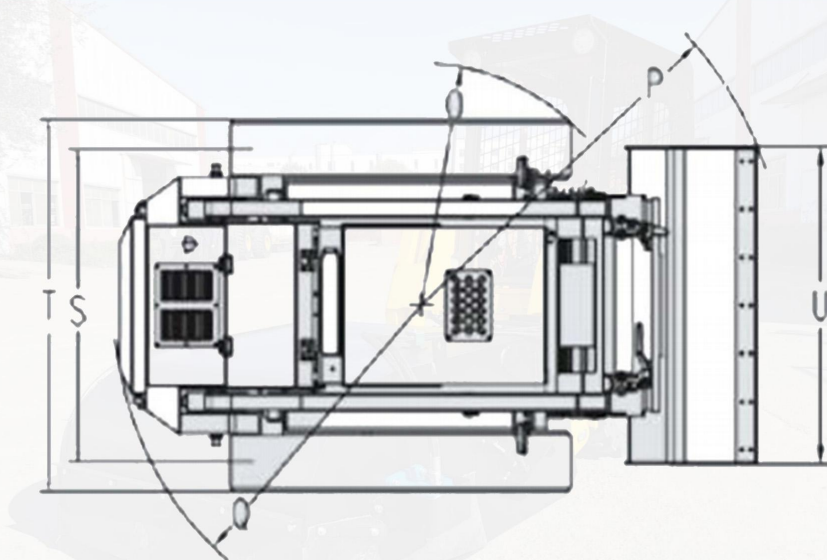

HIKEN | TECHNICAL DATA

Overall Operating Height(mm)	4070
Height to bucket hinge pin (mm)	3150
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	2983
Without bucket length (mm)	3000
Overall Length With Bucket(mm)	3700
Dumping angle at maximum height(°)	40
Dumping height (mm)	2450
Dumping reach (mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1500
Ground clearance(mm)	200
Angle of departure(°)	20
Front turning radius without bucket(mm)	1365
Front tuning radius(mm)	2200
Rear tuning radius(mm)	1742
Rear axle to bumper(mm)	938
Operating load(kg)	1200
Max Speed	9/18
Overall length(mm)	3700
Overall width (mm)	1994



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL400 SKID STEER LOADER

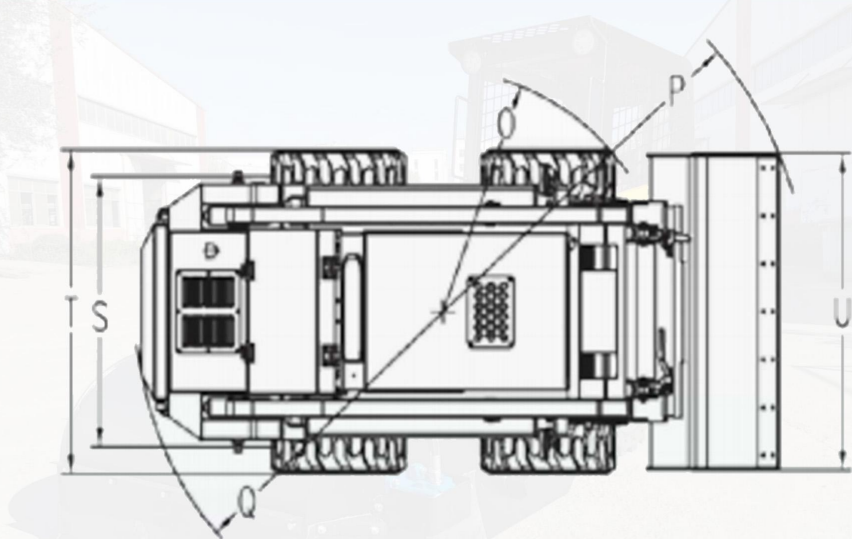

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	3401
Height to bucket hinge pin (mm)	2642
Hheight to top of cab (mm)	1812
Height to bottom of level bucket (mm)	2477
Without bucket length (mm)	2090
Overall Length With Bucket(mm)	2768
Dumping angle at maximum height(°)	36
Dumping height (mm)	1990
Dumping reach (mm)	419
Rollback o bucket on ground(°)	25
Rollback of bucket at full height(°)	97

Wheelbasel (mm)	801
Ground clearance(mm)	129
Angle of departure(°)	28
Front turning radius without bucket(mm)	971
Front tuning radius(mm)	1557
Rear tuning radius(mm)	1146
Rear axle to bumper(mm)	738
Operating load(kg)	380
Max Speed	9km/h
Overall length(mm)	2959
Overall width (mm)	927



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL500 SKID STEER LOADER

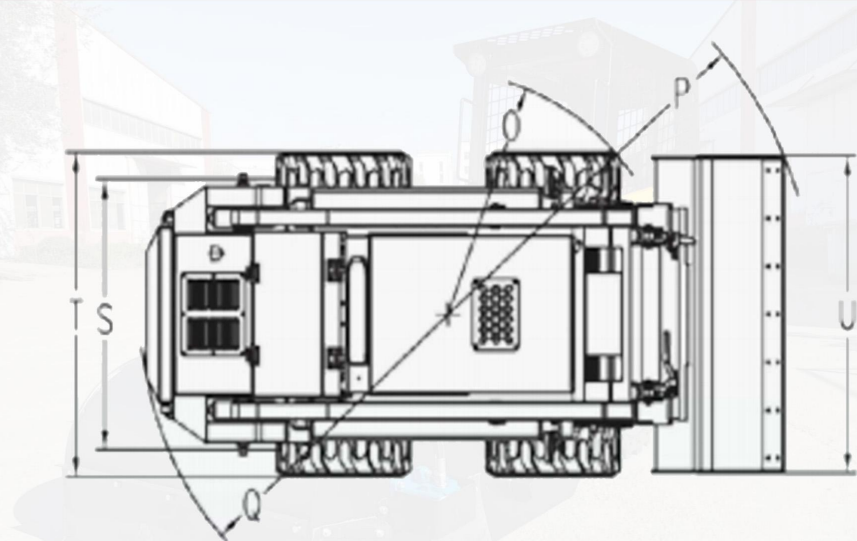

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	3300
Height to bucket hinge pin (mm)	2725
Hheight to top of cab (mm)	2000
Height to bottom of level bucket (mm)	2558
Without bucket length (mm)	2300
Overall Length With Bucket(mm)	2950
Dumping angle at maximum height(°)	40
Dumping height (mm)	2050
Dumping reach (mm)	790
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	897
Ground clearance(mm)	140
Angle of departure(°)	20
Front turning radius without bucket(mm)	1098
Front tuning radius(mm)	1760
Rear tuning radius(mm)	1296
Rear axle to bumper(mm)	964
Operating load(kg)	500
Max Speed	10km/h
Overall length(mm)	2950
Overall width (mm)	1350



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL700 SKID STEER LOADER

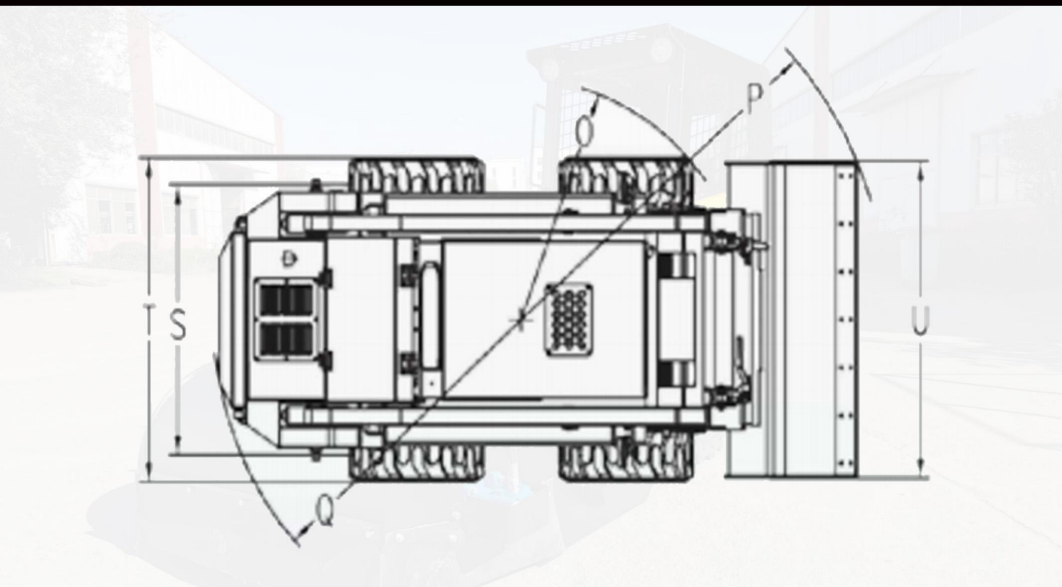

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	3980	Wheelbasel (mm)	991
Height to bucket hinge pin (mm)	3080	Ground clearance(mm)	185
Hheight to top of cab (mm)	2140	Angle of departure(°)	20
Height to bottom of level bucket (mm)	2913	Front turning radius without bucket(mm)	1168
Without bucket length (mm)	2640	Front tuning radius(mm)	1958
Overall Length With Bucket(mm)	3420	Rear tuning radius(mm)	1630
Dumping angle at maximum height(°)	40	Rear axle to bumper(mm)	1108
Dumping height (mm)	2380	Operating load(kg)	700
Dumping reach (mm)	700	Max Speed	12km/h
Rollback o bucket on ground(°)	30	Overall length(mm)	3420
Rollback of bucket at full height(°)	104	Overall width (mm)	1720



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL850 SKID STEER LOADER

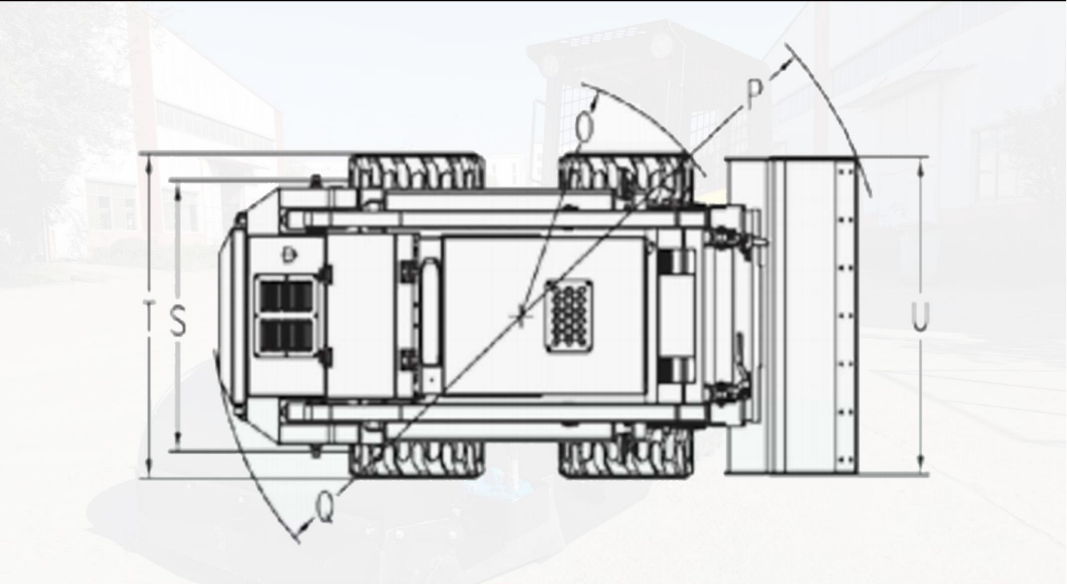

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	4000
Height to bucket hinge pin (mm)	3100
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	2933
Without bucket length (mm)	2750
Overall Length With Bucket(mm)	3490
Dumping angle at maximum height(°)	40
Dumping height (mm)	2400
Dumping reach (mm)	750
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	991
Ground clearance(mm)	205
Angle of departure(°)	20
Front turning radius without bucket(mm)	1198
Front tuning radius(mm)	1958
Rear tuning radius(mm)	1728
Rear axle to bumper(mm)	1208
Operating load(kg)	850
Max Speed	12km/h
Overall length(mm)	3490
Overall width (mm)	1880



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL950 SKID STEER LOADER

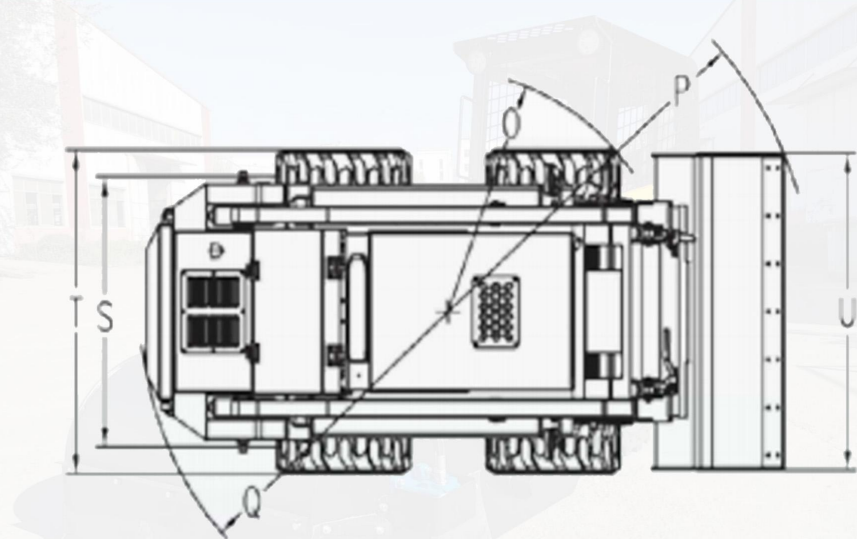

HIXEN | TECHNICAL DATA

Overall Operating Height(mm) 4070

Height to bucket hinge pin (mm) 3150

Hheight to top of cab (mm) 2160

Height to bottom of level bucket (mm) 2983

Without bucket length (mm) 2880

Overall Length With Bucket(mm) 3580

Dumping angle at maximum height(°) 40

Dumping height (mm) 2450

Dumping reach (mm) 700

Rollback o bucket on ground(°) 30

Rollback of bucket at full height(°) 104

Wheelbasel (mm) 1115

Ground clearance(mm) 205

Angle of departure(°) 20

Front turning radius without bucket(mm) 1250

Front tuning radius(mm) 2112

Rear tuning radius(mm) 1774

Rear axle to bumper(mm) 1082

Operating load(kg) 950

Max Speed 12-16.5km/h

Overall length(mm) 3580

Overall width (mm) 1880



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL1050 SKID STEER LOADER

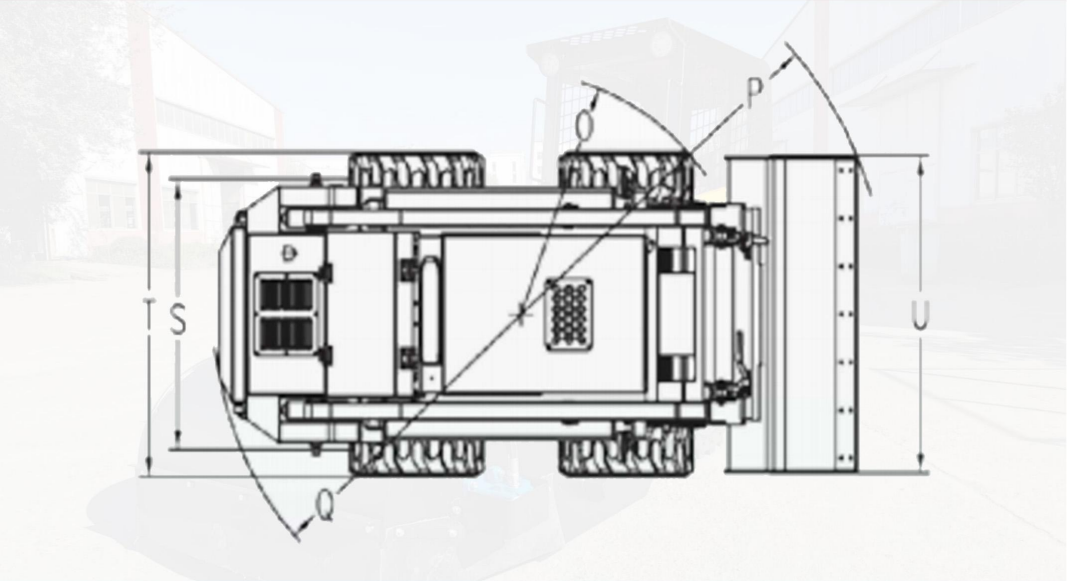

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	4070
Height to bucket hinge pin (mm)	3150
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	2983
Without bucket length (mm)	2880
Overall Length With Bucket(mm)	3580
Dumping angle at maximum height(°)	40
Dumping height (mm)	2450
Dumping reach (mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1115
Ground clearance(mm)	205
Angle of departure(°)	20
Front turning radius without bucket(mm)	1250
Front tuning radius(mm)	2112
Rear tuning radius(mm)	1774
Rear axle to bumper(mm)	1082
Operating load(kg)	1050
Max Speed	12km/h
Overall length(mm)	3580
Overall width (mm)	1880



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL1100 SKID STEER LOADER

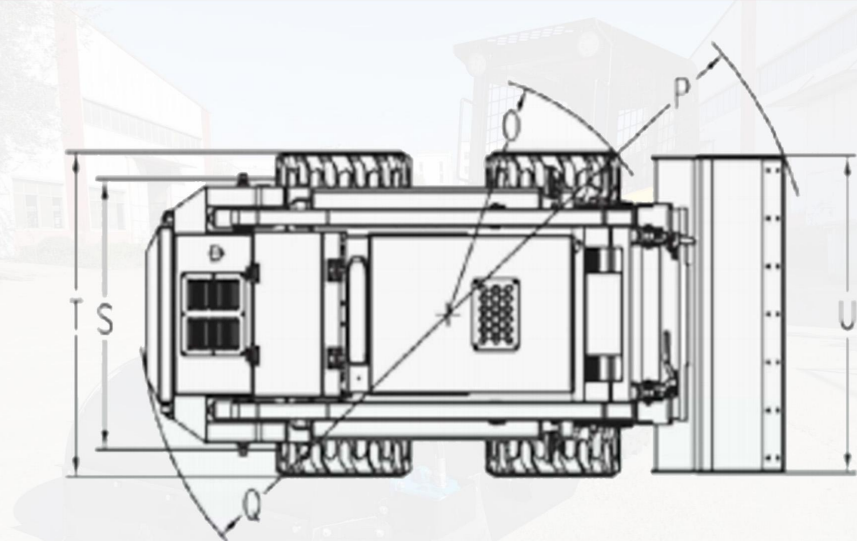

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	4070
Height to bucket hinge pin (mm)	3280
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	3140
Without bucket length (mm)	2880
Overall Length With Bucket(mm)	3580
Dumping angle at maximum height(°)	40
Dumping height (mm)	2500
Dumping reach (mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1115
Ground clearance(mm)	205
Angle of departure(°)	20
Front turning radius without bucket(mm)	1278
Front tuning radius(mm)	2144
Rear tuning radius(mm)	1875
Rear axle to bumper(mm)	1082
Operating load(kg)	1100
Max Speed	12-16.5km/h
Overall length(mm)	3580
Overall width (mm)	1880



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.




Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.



HIXEN | HL1200 SKID STEER LOADER

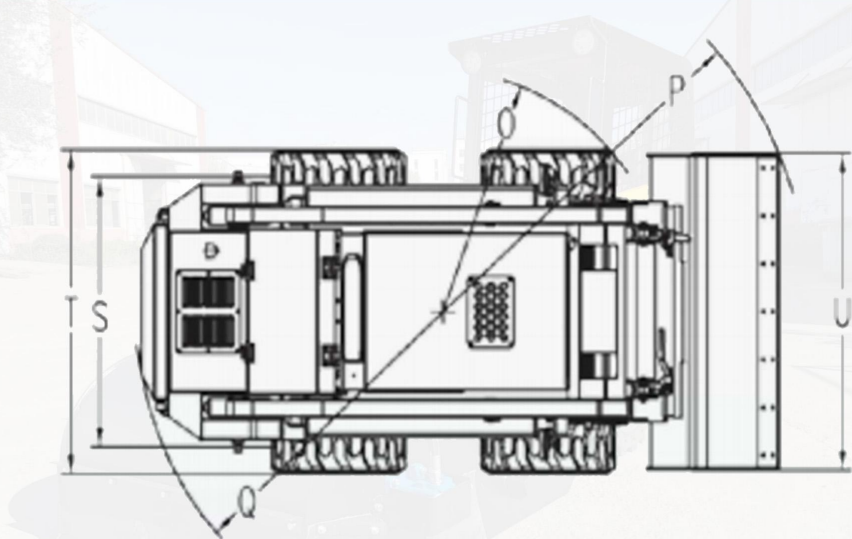

HIXEN | TECHNICAL DATA

Overall Operating Height(mm)	4070
Height to bucket hinge pin (mm)	3280
Hheight to top of cab (mm)	2160
Height to bottom of level bucket (mm)	3140
Without bucket length (mm)	2880
Overall Length With Bucket(mm)	3580
Dumping angle at maximum height(°)	40
Dumping height (mm)	2500
Dumping reach (mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104

Wheelbasel (mm)	1115
Ground clearance(mm)	205
Angle of departure(°)	20
Front turning radius without bucket(mm)	1278
Front tuning radius(mm)	2144
Rear tuning radius(mm)	1857
Rear axle to bumper(mm)	1082
Operating load(kg)	1200
Max Speed	12-16.5km/h
Overall length(mm)	2880
Overall width (mm)	1880



Tight Size

Its smaller size - the minimum with only 71cm wide when paired with a bucket - allows it to squeeze through doorways and fence gates or do work indoors. Plus, it's easy to load and transport on a trailer.



Torque for All Terrain

A high engine torque provides the power needed for improved pushing power and ground-engaging performance on all kinds of terrain.